



Metdek500

Metdek500 can be used as a residential or commercial roofing solution and is ideal for low pitches. Metdek500 employs a clip fixing system and can be used down to a minimum pitch of 3 degrees.

Metdek500 is available in 0.55 G550 COLORSTEEL MAXAM®

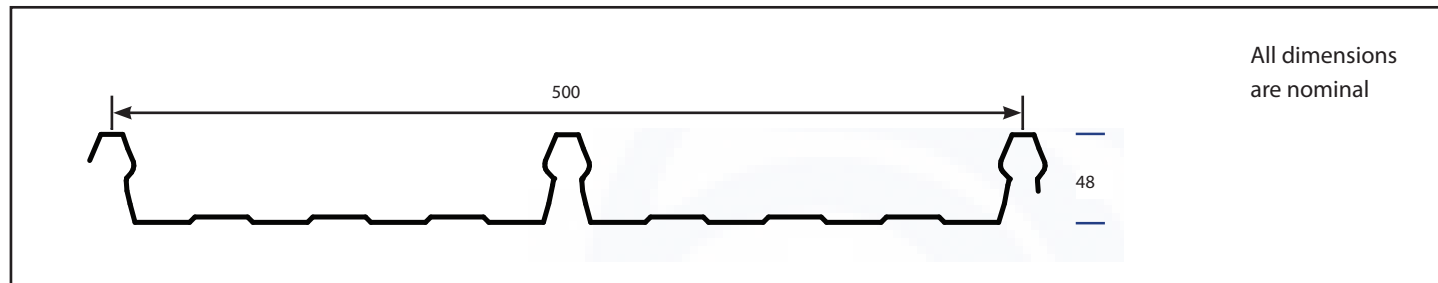

Cover: 500mm Sheet Width: 515mm Minimum Pitch 3°


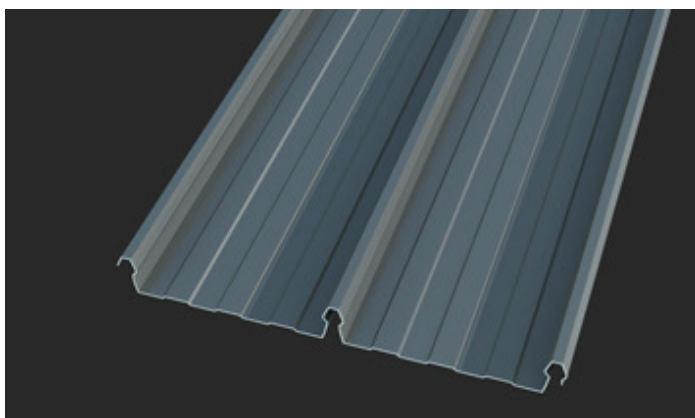


Recommended Fixings


Timber: Spiral Shank Nails or 12G x 35mm screws

Steel: Wafertek 12G x 16mm

Fixing Patterns – 1 clip per sheet per Purlin

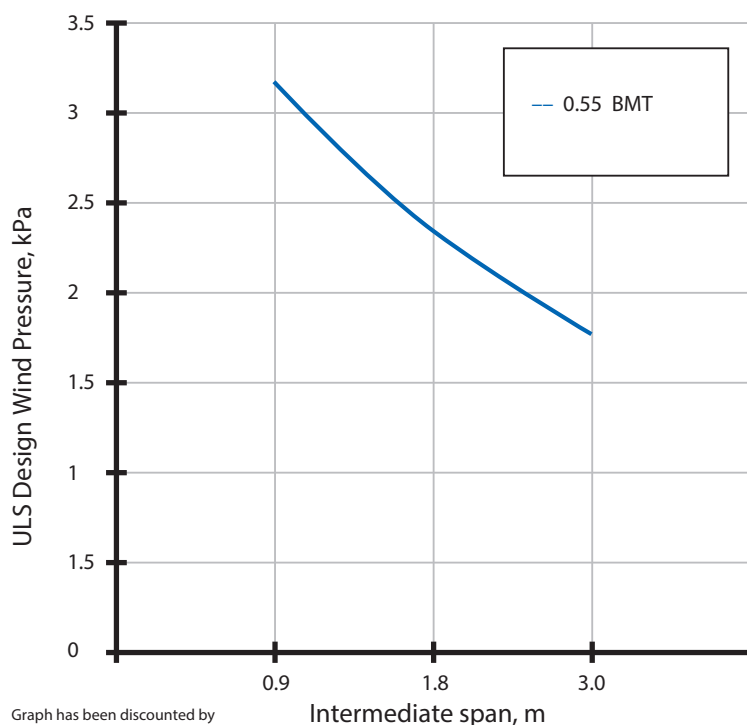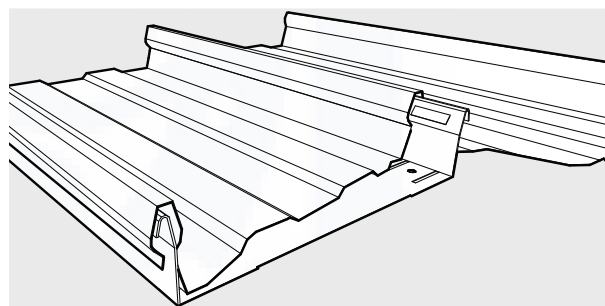

Graph has been discounted by a 1.38 variability factor

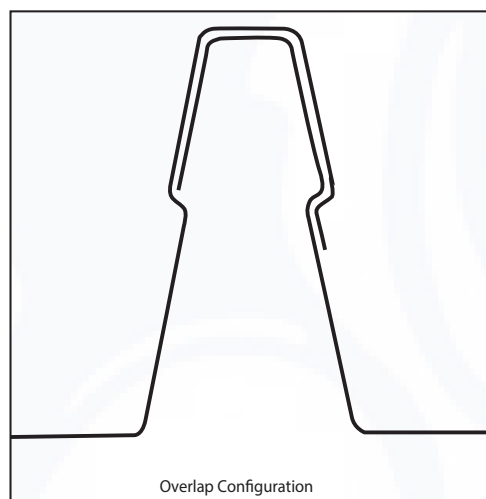

Note: The intermediate spans shown in the graph to the left are based on G550 Steel as the base metal. To calculate end spans please multiply the intermediate span calculated by 0.66. Spans are based on restricted access. For alternative metals please contact your local Metalcraft branch.

Manufacturing locations: Auckland

Metdek500 is available for purchase from all Metalcraft branch locations.

0800 ROOFNZ

www.metalcraftroofing.co.nz